


# 150 PIN VEAM — FEMALE

## WIRING VIEW

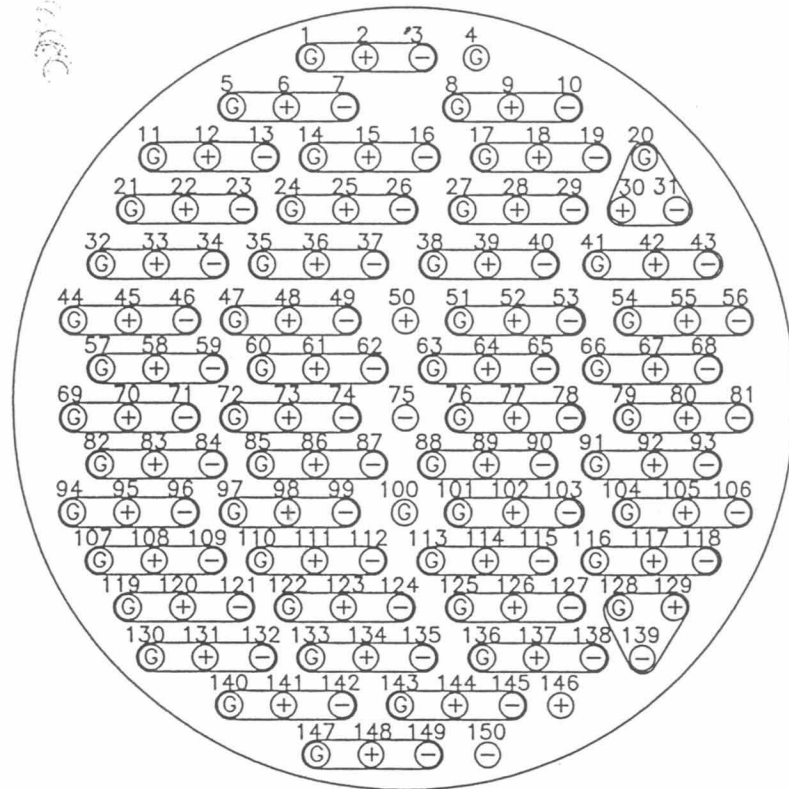

Pair #	Ground	Hot	Cold	Pair#	Ground	Hot	Cold
1	1	2	3	26	79	80	81
2	5	6	7	27	82	83	84
3	8	9	10	28	85	86	87
4	11	12	13	29	88	89	90
5	14	15	16	30	91	92	93
6	17	18	19	31	94	95	96
7	20	30	31	32	97	98	99
8	21	22	23	33	101	102	103
9	24	25	26	34	104	105	106
10	27	28	29	35	107	108	109
11	32	33	34	36	110	111	112
12	35	36	37	37	113	114	115
13	38	39	40	38	116	117	118
14	41	42	43	39	119	120	121
15	44	45	46	40	122	123	124
16	47	48	49	41	125	126	127
17	51	52	53	42	128	129	139
18	54	55	56	43	130	131	132
19	57	58	59	44	133	134	135
20	60	61	62	45	136	137	138
21	63	64	65	46	140	141	142
22	66	67	68	47	143	144	145
23	69	70	71	48	147	148	149
24	72	73	74	49	4	50	75
25	76	77	78	50	100	146	150

### NOTES:

1. LOAD FEMALE SOCKETS FROM FRONT OF CONNECTOR.
2. UNLOAD FEMALE SOCKETS FROM REAR OF CONNECTOR.  
USE NEEDLE NOSE PLIERS.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



CABLETEK ELECTRONICS LTD.

PORT COQUITLAM, BC.

TITLE  
RADIAL CA150 FEMALE (VEAM)

This document contains information proprietary to CableTek Electronics Ltd. and shall not be used for Engineering, Design, Procurement or Manufacture, in whole or in part, without the written consent of CableTek Electronics Ltd.

DESIGNED BY: SORIN POPA	DWG NO.	REV
APPROVED BY: CARSON FEE	10008-1	A
DATE: 16-OCT-1998	FINISH:	SHEET 1 of 1