SmartReel Cable & Cable Management

*Smart*Reel™ Cable by Radial

...Makes organizing and managing cable inventory easy!

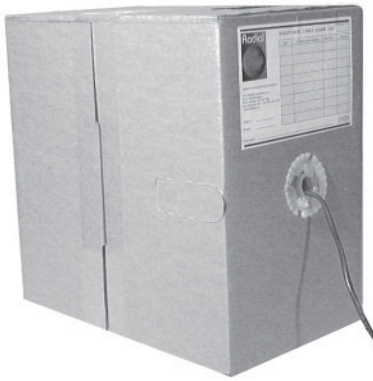

No more mess or cable splicing from reel lengths that were just a little too short. No more approximate customer billing. No more waste inventory! ***Smart*Reel** cable is marked at every foot and counted down to provide an easy reference of remaining cable length. A usage log is provided on every box allowing easy and accurate cable use accounting. Takes the guesswork out of installs and cable management!

- > Cable is marked at every foot
- > Comes with cable management log
- > Instant inventory control
- > No more messy piles of cable
- > Improves profitablity

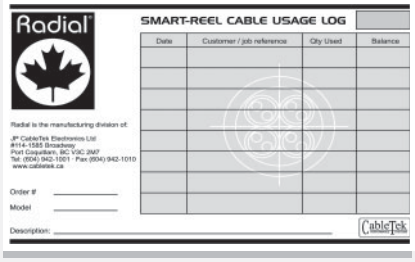



Radial *Smart*Reel balanced twisted pair install cable. Choice of FT-4 or plenum rated PVC jacket. Applications include microphone, line and low voltage speaker.

Radial audio cable

Order #	Model	Cond	Shield	Gauge	OD (in)
B270 0203	RM222p	2	foil	22 AWG	.145
B270 2202	RM222cx	2	foil	22 AWG	.165
B270 2204	RM422cx	4	foil	22 AWG	.222
B370 1802	RS218cx	2	foil	18 AWG	.185
B370 1804	RS418cx	4	foil	18 AWG	.220

Roll Lengths: 1000' / 305m
Jacket: p = plenum, cx = FT-4



Radial speaker cable features compact construction and rugged, easy to pull FT-4 jacket. Choice of 12AWG, 14AWG and 16AWG for all speaker system power requirements.

Radial speaker cable

Order #	Model	Cond	Strands	Gauge	OD (in)
B370 1602	RS216cx	2	19x29	16 AWG	.210
B370 1402	RS214cx	2	19x26	14 AWG	.244
B370 1202	RS212cx	2	19x23	12 AWG	.312
B370 1604	RS416cx	4	19x29	16 AWG	.245
B370 0412	RS412cx	4	65x30	12 AWG	.471
B370 0414	RS414cx	4	41x30	14 AWG	.392

Roll Lengths: 1000' / 305m
Jacket: cx = FT4

Rack and Console





Mogami 2944 balanced install cable is the standard for studio console, rack and patch bay wiring. Features an ultra-flexible PVC jacket, twisted pair construction, a served shield with drain and 100% oxygen free Neglex copper. Low capacitance design for added definition. Use the similarly constructed **W2806** for long runs.

Mogami balanced audio cable

Order #	Model	Cond	Shield	Gauge	OD (in)
W200 2944-xx	W2944	2	served	26 AWG	.098
W200 2806-08	W2806	2	served	22 AWG	.205

'xx' = colour suffix; add suffix to end of order #.

Capacitance: 2944: 40pF/ft (130pF/m); 2806: 27pF/ft (87pF/m)
Roll Lengths: 328' / 100m, 656' / 200m
Colours: W2944: Available in 10 colours (below)
W2806: Available only in Gry-08

Blk-00, Red-02, Org-03, Yel-04, Grn-05, Blu-06, Pur-07, Gry-08, Wht-09



Mogami W2799 balanced quad is a compact cable for rack and console wiring for high noise environments. Features oxygen free copper and cross-linked polyethylene insulators for low capacitance. Use the similarly constructed **W2820** for long runs.

Mogami balanced Quad audio cable

Order #	Model	Cond	Shield	Gauge	OD (in)
W200 2799-08	W2799	4	served	26 AWG	.126
W200 2820-08	W2820	4	served	24 AWG	.197

Capacitance: 2799: 21pF/ft (69pF/m), 2820: 20pF/ft (66pF/m)
Roll Lengths: 328' / 100m, 656' / 200m
Colours: Gry-08